

UNIVERSAL TYPE DIGITAL PANEL METER

# A5000 SERIES



Display multi type (A52XX-XX)



Display single type (A51XX-XX)

ASAHI KEIKI CO., LTD.



# Input Specification (A5XXX-□□)

## • DC voltage, current

	Range	Measurement range	Display	Maximum Resolution	Input Impedance	Input Protection	Accuracy
01	11	±99.99 mV	offset ±9999 full scale 0 to ±9999	10 µV	100 MΩ	±100 V	±(0.1% of FS)
	12	±999.9 mV		10 µV			
02	13	±9.999 V	offset ±9999 full scale 0 to ±9999	1 mV	1 MΩ	±100 V	±(0.1% of FS)
	14	±99.99 V		10 mV	10 MΩ	±250 V	±(0.1% of FS)
	15	±600 V		100 mV	10 MΩ	±600 V	±(0.15% of FS)
03	23	±9.999 mA	offset ±9999 full scale 0 to ±9999	1 µA	10 Ω	±100 mA	±(0.2% of FS)
	24	±99.99 mA		10 µA	1 Ω	±500 mA	±(0.2% of FS)
	25	±999.9 mA		100 µA	0.1 Ω	±3 A	±(0.3% of FS)

Input configuration : Single ended  
 Measuring method : ΔΣ type  
 Normal mode rejection : More than NMR 50dB (50/60 Hz)

## • AC voltage, current (Average)

	Range	Measurement range	Input Frequency	Display	Maximum Resolution	Input Impedance	Input Protection	Accuracy
04	11	99.99 mV	40 Hz to 1 kHz	offset ±9999 full scale 0 to ±9999	10 µV	more than 1 MΩ	100 V	±(0.2% of rdg + 10 digit)
	12	999.9 mV			100 µV		100 V	±(0.2% of rdg + 10 digit)
	13	9.999 V			1 mV		250 V	±(0.2% of rdg + 10 digit)
05	14	99.99 V	40 Hz to 1 kHz	offset ±9999 full scale 0 to ±9999	10 mV	more than 1 MΩ	250 V	±(0.2% of rdg + 10 digit)
	15	600 V			100 mV		600 V	±(0.3% of rdg + 10 digit)
08	23	9.999 mA	40 Hz to 1 kHz	offset ±9999 full scale 0 to ±9999	1 µA	10 Ω	100 mA	±(0.5% of rdg + 10 digit)
	24	99.99 mA			10 µA	1 Ω	500 mA	±(0.5% of rdg + 10 digit)
	25	999.9 mA			100 µA	0.1 Ω	3 A	±(0.5% of rdg + 10 digit)
09	26	5 A	50 Hz or 60 Hz	offset ±9999 full scale 0 to ±9999	1 mA	CT	8 A	±(0.5% of rdg + 10 digit)

## • AC voltage, current (TRUE-RMS)

	Range	Measurement range	Input Frequency	Display	Maximum Resolution	Input Impedance	Input Protection	Accuracy
06	11	99.99 mV	40 Hz to 1 kHz	offset ±9999 full scale 0 to ±9999	10 µV	more than 1 MΩ	100 V	±(0.2% of rdg + 20 digit)
	12	999.9 mV			100 µV		100 V	±(0.2% of rdg + 20 digit)
	13	9.999 V			1 mV		250 V	±(0.2% of rdg + 20 digit)
07	14	99.99 V	40 Hz to 1 kHz	offset ±9999 full scale 0 to ±9999	10 mV	more than 1 MΩ	250 V	±(0.2% of rdg + 20 digit)
	15	600 V			100 mV		600 V	±(0.3% of rdg + 20 digit)
10	23	9.999 mA	40 Hz to 1 kHz	offset ±9999 full scale 0 to ±9999	1 µA	10 Ω	100 mA	±(0.5% of rdg + 20 digit)
	24	99.99 mA			10 µA	1 Ω	500 mA	±(0.5% of rdg + 20 digit)
	25	999.9 mA			100 µA	0.1 Ω	3 A	±(0.5% of rdg + 20 digit)
11	26	5 A	50 Hz or 60 Hz	offset ±9999 full scale 0 to ±9999	1 mA	CT	8 A	±(0.5% of rdg + 20 digit)

Input configuration : Single ended  
 Response time : Approx. 1 sec.  
 Crest factor : 4:1 at fullscale (only for TRUE-RMS)  
 Dead zone : 0 to 99 digit

## • Resistance

	Range	Measurement range	Display	Maximum Resolution	Current	Accuracy
12	11	99.99 Ω	offset ±9999 full scale 0 to ±9999	10 mΩ	5 mA	±(0.2% of FS)
	12	999.9 Ω		100 mΩ	0.5 mA	±(0.1% of FS)
	13	9.999 kΩ		1 Ω	50 µA	±(0.1% of FS)
	14	99.99 kΩ		10 Ω	5 µA	±(0.1% of FS)

## • Thermocouple

	Range	Sensor type	Measurement range	Maximum Resolution	Accuracy
13	KA	K	-50.0 to 199.9°C	0.1°C	±(0.5% of FS)
	KB	K	-50 to 1200°C	1°C	±(0.2% of FS)
	J	J	-50 to 1000°C	1°C	±(0.2% of FS)
	T	T	-50 to 400°C	1°C	±(0.6% of FS)
	S	S	0 to 1700°C	1°C	±(0.4% of FS)
	R	R	-10 to 1700°C	1°C	±(0.4% of FS)
	B	B	100 to 1800°C	1°C	±(0.4% of FS) over 500°C

available Fahrenheit display  
 Cold junction compensator accuracy : ±1°C (10 to 40°C)  
 Sensor lead resistance : less than 50Ω  
 Linearizing method : Digital linearizing  
 Burn out alarm : -----

## • RTD

	Range	Sensor type	Measurement range	Measurement range	Maximum Resolution	Accuracy
14	PA	PT100Ω	-100.0 to 199.9°C	-100.0 to 199.9°C	0.1°C	±(0.15% of FS)
	PB	PT100Ω	-100 to 600°C	-100 to 600°C	1°C	±(0.3% of FS)

available Fahrenheit display

Current for resistance : Approx. 1 mA  
 External lead resistance : Less than 10 Ω/lead  
 Linearizing method : Digital linearizing  
 Burn out alarm : -----

## • Frequency

Range	Measurement range	Display	Maximum Resolution	Display Renewal time	Accuracy
11	0.1 to 200 Hz	Prescale : 0.001 to 5 1 to 100	0.1 Hz	1 to 10 s	±(0.2% of FS)
12	1 to 2000 Hz		1 Hz	1 s	±(0.2% of FS)
13	0.01 to 20 kHz		10 Hz	100 ms	±(0.2% of FS)
14	0.1 to 200 kHz		100 Hz	100 ms	±(0.2% of FS)

	Input type	Input voltage level	Input Protection
15	Open collector	L: less than 1 V (5 V, 2.2 kΩ) pullup	30 V
	Logic	L: less than 1 V, HI: 2.5 to 15 V	15 V
	Magnet	0.3 to 30 V P-P	15 V

	Input type	Input voltage level	Input Protection
16	Voltage	50 to 500 V rms	500 V

## • Strain gauge

	Power supply for sensor	Zero adjustment range	Span adjustment range	Maximum Resolution	Accuracy
17	5 V	-0.3 to +2 mV/V	1 to 3 mV/V	0.5 μV/digit	±(0.1% of FS) +2 digit
	10 V			1 μV/digit	

Sensor : 350 Ω  
 Power supply for sensor : 5 V±5% (less than 15 mA)  
 10 V±5% (less than 30 mA)

## • Process

	Range	Measurement range	Display	Input Impedance	Display Renewal time	Accuracy
18	1 V	1 to 5 V	offset ±9999	1 MΩ	±100 V	±(0.2% of FS)
	2 A	4 to 20 mA	full scale 0 to ±9999	10 Ω	±100 mA	±(0.2% of FS)

# Output Specification

## • HI & LO setpoint output (A5XX1-XX)

Indication > High setpoint	HI
High setpoint ≥ Indication ≥ Lo setpoint	GO
Indication < Lo setpoint	LO

Setting range : -9999 to 9999  
 Hysteresis : 1 to 999 digit for each setpoints  
 Relay contact capacity : AC240V 8A resistive load  
 DC30V 8A resistive load

## • Analog output (A5XX2-XX)

Output	Resistive load	Accuracy
0 to 1 V	more than 10 kΩ	±(0.5% of FS)
0 to 10 V	more than 10 kΩ	
1 to 5 V	more than 10 kΩ	
4 to 20 mA	less than 550 Ω	

Output method : PWM method  
 Scaling : Digital scaling

## • RS-232C (Conforming to EIA RS-232C) (A5XX3-XX)

Communication method	: Full duplex
Transmission speed	: 2400/4800/9600/19200/38400 bps
Start bit	: 1 bit
Data length	: 7 bit/8 bit
Parity	: Even parity/odd parity
Stop bit	: 1 bit/2 bit
Character code	: ASCII code
Transmission control process	: Ignored process


## • RS-485 (Conforming to EIA RS-485) (A5XX4-XX)

Communication method	: Full duplex
Transmission speed	: 2400/4800/9600/19200/38400 bps
Start bit	: 1 bit
Data length	: 7 bit/8 bit
Parity	: Even parity/odd parity
Error detection	: BCC
Stop bit	: 1 bit/2 bit
Character code	: ASCII code
Transmission control process	: Ignored process
Signal name	: + non reversal output - reversal output
Maximum No. of meter connected	: 31
Line length	: Up to 500 m in total

# Common Specification

Display	: Main display Red LED 14.2 mm height Sub display Green LED 8 mm height	
Conversion rate	: 12.5 times/sec.	
Maximum display	: 9999	
Overrange indication	: When input exceeds the maximum display, display OL or -OL	
Zero display	: Leading zero suppression	
Decimal point	: Settable to any digit position	
External control	: Start/Hold, Peak Hold, Digital Zero	
Operating temp.	: 0 to 50°C 35 to 85% RH	
Storage temp.	: -10 to 70°C less than 60% RH	
Power supply	: AC 100 to 240V±10%(AC main unit) DC 9 to 60 V (DC main unit)	
Power consumption	: approx 4 VA (at 100 V)	
Dimensions	: 96 mm X 48 mm (H) X 147.5 mm (D) DIN size	
Weight	: approx. 450 g	
Dielectric strength (AC)	: Power supply/input terminal/output terminal Input terminal/output terminal Case/power supply/input terminal output terminal	AC2000 V/1 min. DC500 V/1 min. AC2000 V/1 min.
Dielectric strength (DC)	: Power supply/input terminal/output terminal Input terminal/output terminal Case/power supply/input terminal output terminal	DC500 V/1 min. DC500 V/1 min. AC2000 V/1 min.
Insulation resistance	: DC500 V more than 100 MΩ at the above terminals	

## Dimensions

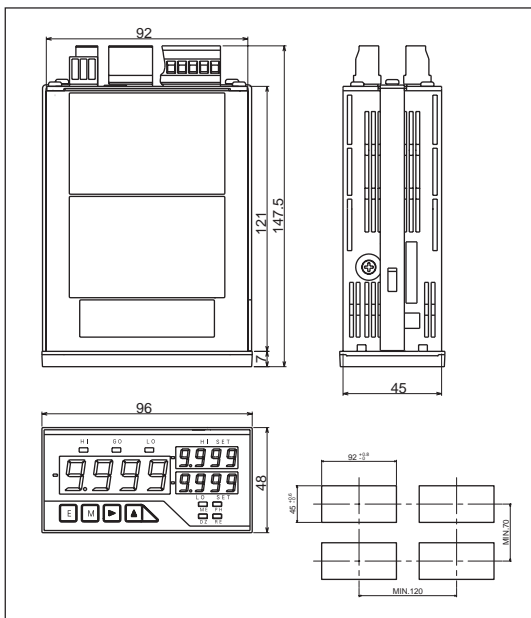

## Ordering Code

A 5 □ □ □ - □ □

Input	01. DC voltage (±99.99 mV) 02. DC voltage (±999.9 mV to ±600V) 03. DC current (±9.999 mA to ±999.9 mA) 04. AC voltage AVG (99.99 mV to 9.999 V) 05. AC voltage AVG (99.99 V to 600 V) 06. AC voltage RMS (99.99 mV to 9.999 V) 07. AC voltage RMS (99.99 V to 600 V) 08. AC current AVG (9.999 mA to 999.9 mA) 09. AC current AVG (5 A) 10. AC current RMS (9.999 mA to 999.9 mA) 11. AC current RMS (5 A) 12. Resistance (99.99 Ω to 99.99 kΩ) 13. Temperature (Thermocouple) 14. Temperature (RTD) 15. Frequency (Open collector, Logic, Magnet) 16. Frequency (50 to 500 Vrms) 17. Strain gauge 18. 1 to 5 V, 4 to 20 mA
Output	0. None 1. HI & LO setpoint 2. Analog output 3. RS-232C 4. RS-485 5. HI & LO setpoint + analog output 6. HI & LO setpoint + analog output + RS-232C 7. HI & LO setpoint + analog output + RS-485
Display board	1. Single 2. Multiple
Main board	1. AC100 - 240 V (±10%) 2. DC9 - 60 V

We reserve the right to change specifications without notice.



**ASAHI KEIKI CO., LTD.**

33-6, YAGUCHI 2-CHOME, OHTA-KU,  
TOKYO 146-8505, JAPAN  
FAX : (03)3757-2989  
PHONE : (03)3579-3893  
http:// www.asahikeiki.co.jp  
E-mail: dpm-overseas@asahikeiki.co.jp