

Transmitter

TH-1X

NEW



Features

- Easy to change input/output code (SJ)
- Slim width 12.5 mm
- DIN rail mount type
- 24 VDC power supply

Input specifications

DC voltage & current

Code No.	Input signal	Input resistance
0	DC 0 to 5 V	more than 1MΩ
1	DC 1 to 5 V	
2	DC 0 to 10 V	
3	DC -10 to 10 V	
4	DC 0 to 1 V	
5	DC 0 to 0.1 V	250Ω
A	DC 4 to 20 mA	
Y	special	

Special: Voltage input less than 250 V DC, min span 0.1 V
Current input less than 50 mA DC, min span 5 mA DC

Output specification

DC voltage & current

Code No.	Output signal	Load resistance
0	DC 0 to 5 V	more than 2KΩ
1	DC 1 to 5 V	more than 2KΩ
2	DC 0 to 10 V	more than 4KΩ
3	DC -10 to 10 V	more than 4KΩ
A	DC 4 to 20 mA	less than 550Ω
Y	special	


Special: Voltage input less than ±10 V DC, min span 1 VDC
Current input less than 20 mA DC, min span 5 mA DC

General specification


Accuracy:	±0.25% F.S
Temp. Coefficient:	±0.02% F.S/°C
Response Time:	less than 20 msec (0 to 90%TYP)
Insulated Resistance:	input/output/power supply, more than 100MΩ
Dielectric Strength:	input/output/power supply, AC 1500V/1 min.
Power Supply:	24 V DC±10%
Power consumption:	less than 60 mA
Operating Temp.:	-5 to 50°C less than 90%RH
Size:	99 mm (H)×12.5 mm(W)×115 mm(D)

Ordering Code

TH-1X-

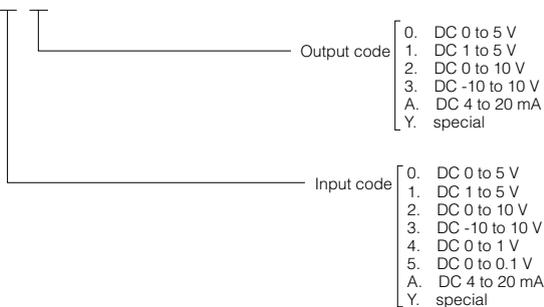

Dimensions

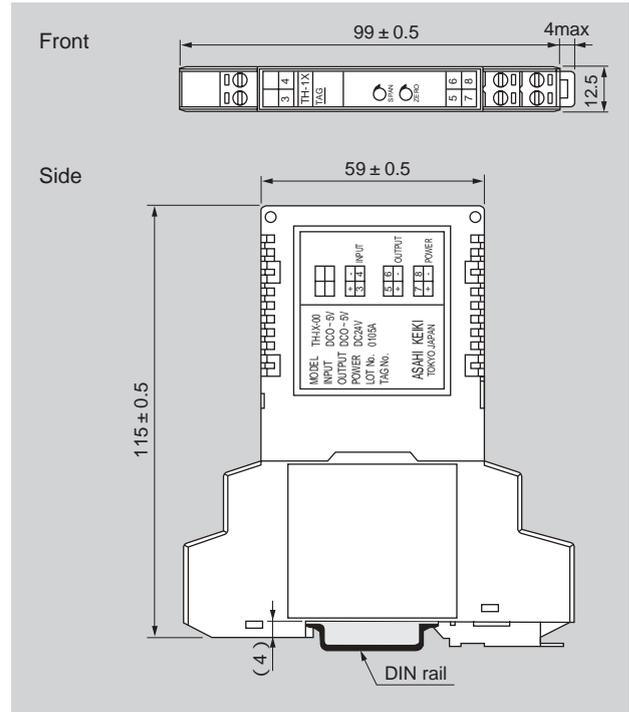

Connection Diagram

